

pewag

**STRONG
IS NOT
ENOUGH**

www.pewag.com

pewag winner profilift lifting points

Lifting and lashing

**NEW
2014**



MACHINETOOL
TURVALLISTA LAATUA

Screwable lifting points

Product Overview



MACHINETOOL
TURVALLISTA LAATUA

Safe. Innovative. pewag.

Competent safety in case of lifting and lashing for the operating staff and goods

The premium Austrian chain manufacturer pewag – standing for innovation, quality and safety – offers in the area of lifting points high quality products that set new standards within the chain industry in terms of lifting and moving of loads. pewag winner profilift lifting points are perfectly suited as an addition to the world wide successful pewag winner lifting chains. pewag places great emphasis on continuous improvements and innovations in the field of lifting point, thus keeping one step ahead of the market at all times. Simultaneously we are working on the further extension of the lifting points assortment, whereas safety, user friendliness and comptability are placed at the central point. Each pewag winner lifting point is marked with an individual serial number and convinces with an innovative design.

pewag winner profilift lifting points correspond to the Machine-Directive (MRL) 2006/42/EG respectively Machine-Safety-prescriptions (MSV) 2010 as well as EN 1677-1 and technical specifications. The pewag winner profilift lifting points are produced in our ISO 9001 and 14001 certified plants and guarantee a 4-respectively 5-fold safety and a maximum dynamic load of min. 20.000 load cycles, tested at 1,5-fold working load limit.

The table with the working load limit – depending on the type of application as lifting gear, number of legs and angle of inclination – is a part of the detailed user manual corresponding to the Machine-Safety-prescriptions 2010 and Machine-Directive and is packed together with each lifting point.


Exact dimensions (for example load capacite and dimensions) and 3D-models can be found on our website www.pewag.com under industrial chains/lifting points.



Stamping of the serial number




Testing in pewag laboratory

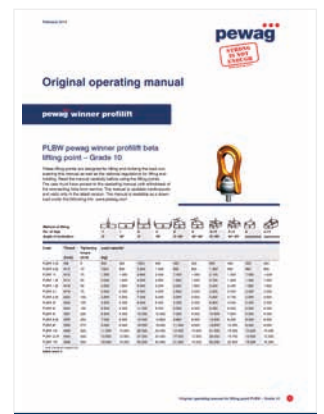



User manual

Screwable lifting points


Overview

PLGW pewag winner profilift gamma supreme and basic	Code	Thread [mm]	Load capacity [kg]
	PLGW 0,3 t	M8 x 1,25	300
	PLGW 0,5 t	M10 x 1,5	500
	PLGW 0,7 t	M12 x 1,75	700
	PLGW 1,5 t	M16 x 2	1.500
	PLGW 2 t	M20 x 2,5	2.000
	PLGW 2,3 t	M20 x 2,5	2.300
	PLGW 3 t	M24 x 3	3.000
	PLGW 3,2 t	M24 x 3	3.200
	PLGW 4 t	M30 x 3,5	4.000
	PLGW 4,9 t	M30 x 3,5	4.900
	PLGW 7 t	M36 x 4	7.000
	PLGW 9 t	M42 x 4,5	9.000
	PLGW 12 t	M48 x 5	12.000


PLGW-SN pewag winner profilift gamma supreme	Code	Thread [mm]	Load capacity [kg]
	PLGW-SN 0,3 t	M8 x 1,25	300
	PLGW-SN 0,5 t	M10 x 1,5	500
	PLGW-SN 0,7 t	M12 x 1,75	700
	PLGW-SN 1,5 t	M16 x 2	1.500
	PLGW-SN 2,3 t	M20 x 2,5	2.300
	PLGW-SN 3,5 t	M24 x 3	3.500
	PLGW-SN 4,9 t	M30 x 3,5	4.900





Mounting Video PLGW


PLAW pewag winner profilift alpha	Code	Thread [mm]	Load capacity [kg]
	PLAW 0,3 t	M8 x 1,25	300
	PLAW 0,63 t	M10 x 1,5	630
	PLAW 1 t	M12 x 1,75	1.000
	PLAW 1,5 t	M16 x 2	1.500
	PLAW 2,5 t	M20 x 2,5	2.500
	PLAW 4 t	M24 x 3	4.000
	PLAW 6 t	M30 x 3,5	6.000
	PLAW 7 t *	M36 x 4	7.000
	PLAW 8 t	M36 x 4	8.000
	PLAW 10 t	M42 x 4,5	10.000
	PLAW 15 t	M42 x 4,5	15.000
	PLAW 20 t	M48 x 5	20.000

* Special models available on request!

PLBW pewag winner profilift beta	Code	Thread [mm]	Load capacity [kg]
	PLBW 0,3 t	M8 x 1,25	300
	PLBW 0,6 t	M10 x 1,5	600
	PLBW 1 t	M12 x 1,75	1.000
	PLBW 1,3 t	M14 x 2	1.300
	PLBW 1,6 t	M16 x 2	1.600
	PLBW 2 t	M18 x 2,5	2.000
	PLBW 2,5 t	M20 x 2,5	2.500
	PLBW 3 t	M22 x 2,5	3.000
	PLBW 4 t	M24 x 3	4.000
	PLBW 5 t	M27 x 3	5.000
	PLBW 6,3 t	M30 x 3,5	6.300
	PLBW 8 t	M33 x 3,5	8.000
	PLBW 10 t	M36 x 4	10.000
	PLBW 12,5 t	M42 x 4,5	12.500
	PLBW 15 t	M48 x 5	15.000

PLDW pewag winner profilift delta	Code	Thread [mm]	Load capacity [kg]
	PLDW 0,3 t	M8 x 1,25	300
	PLDW 0,5 t	M10 x 1,5	500
	PLDW 0,7 t	M12 x 1,75	700
	PLDW 1 t	M14 x 2	1.000
	PLDW 1,5 t	M16 x 2	1.500
	PLDW 2,5 t	M20 x 2,5	2.500
	PLDW 4 t	M24 x 3	4.000
	PLDW 6 t	M30 x 3,5	6.000
	PLDW 8 t	M36 x 4	8.000
	PLDW 10 t	M42 x 4,5	10.000
	PLDW 12,5 t	M48 x 5	12.500

AOR Lashing point	Code	Thread [mm]	Load capacity [kg]
	AOR 10	M16 x 2	3.150
	AOR 13	M20 x 2,5	5.300
	AOR 16	M30 x 3,5	8.000
	AOR 22	M36 x 4	15.000
	AOR 26	M42 x 4,5	21.200
	AOR 28	M45 x 4,5	25.000
	AOR 32	M56 x 5,5	31.500
	AOR 34	M56 x 5,5	36.000

RGS Alloy steel eyebolt	Code	Thread [mm]	Load capacity [kg]
	RGS 8	M8 x 1,25	400
	RGS 10	M10 x 1,5	700
	RGS 12	M12 x 1,75	1.000
	RGS 14	M14 x 2	1.200
	RGS 16	M16 x 2	1.500
	RGS 20	M20 x 2,5	2.500
	RGS 24	M24 x 3	4.000

PLGW pewag winner profilift gamma

pewag winner profilift gamma supreme – tighten by hand, then align in the load direction, a lifting point that has been developed and produced with the new standards in mind. The patented system has proven itself from the beginning.

It is 360° rotatable, contains a patented and interchangeable special screw, which is 100% crack-tested as well as covered with a chrome VI-free finish-protection against corrosion and marked with WLL and thread size.

Tool-free assembly and disassembly

The latch in pos. 1 does not have any contact with the screw (picture 1).

- The latch is kept in position with a patented spring
- Eye bolt is rotatable

The latch in pos. 2 has contact with the screw (picture 2).

- The latch is kept in position with a patented spring
- Eye bolt is not rotatable i.e. the fastening torque is transmitted to the screw and thus the eye bolt can be (re)assembled

A considerably simplified alternative is the pewag PLGW pewag winner profilift gamma basic. With the same benefits as the pewag PLGW supreme in terms of measurement, carrying capacity and application, the pewag PLGW basic differs solely in the assembly: mounting and removing requires the use of a hexagon Allen wrench.



PLGW Supreme – tool-free assembling



PLGW Basic – screw on with tools



Picture 1 PLGW Supreme rotatable




Picture 2 PLGW Supreme dis-/assembly

Method of lifting

Number of legs

Angle of inclination

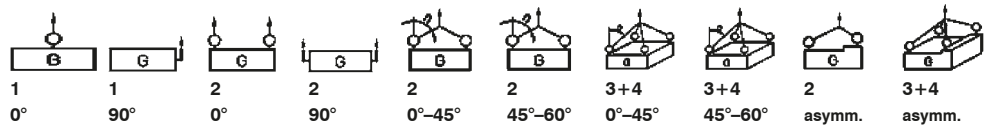

Code	Thread [mm]	Fastening torque [Nm]	Load capacity [kg]									
PLGW 0,3 t	M8	Can be tightened manually	800	300	1.600	600	400	300	600	400	300	300
PLGW 0,5 t	M10		1.100	500	2.200	1.000	700	500	1.000	700	500	500
PLGW 0,7 t	M12		2.000	700	4.000	1.400	1.000	700	1.400	1.000	700	700
PLGW 1,5 t	M16		4.000	1.500	8.000	3.000	2.100	1.500	3.000	2.200	1.500	1.500
PLGW 2 t	M20		5.000	2.000	10.000	4.000	2.800	2.000	4.200	3.000	2.000	2.000
PLGW 2,3 t*	M20		5.000	2.300	10.000	4.600	3.200	2.300	4.800	3.400	2.300	2.300
PLGW 3 t	M24		6.500	3.000	13.000	6.000	4.200	3.000	6.200	4.500	3.000	3.000
PLGW 3,2 t*	M24		6.500	3.200	13.000	6.400	4.500	3.200	6.700	4.800	3.200	3.200
PLGW 4 t	M30		12.000	4.000	24.000	8.000	5.600	4.000	8.200	6.000	4.000	4.000
PLGW 4,9 t*	M30		12.000	4.900	24.000	9.800	6.900	4.900	10.300	7.300	4.900	4.900
PLGW 7 t	M36		15.000	7.000	30.000	14.000	9.800	7.000	14.700	10.500	7.000	7.000
PLGW 9 t	M42		22.000	9.000	44.000	18.000	12.600	9.000	18.900	13.500	9.000	9.000
PLGW 12 t	M48		30.000	12.000	60.000	24.000	16.800	12.000	25.000	18.000	12.000	12.000

* Higher carrying capacity, soon only available in this design!

Code	Thread [inch]	Fastening torque [lb/ft]	Load capacity [lbs]									
PLGW U 3/8	3/8"-16	Can be tightened manually	2.400	1100	4.800	2.200	1.500	1.100	2.200	1.500	1.100	1.100
PLGW U 1/2	1/2"-13		4.400	1500	8.800	3.000	2.200	1.500	3.000	2.200	1.500	1.500
PLGW U 5/8	5/8"-11		8.800	3300	17.600	6.600	4.600	3.300	6.600	4.800	3.300	3.300
PLGW U 3/4	3/4"-10		9.900	4.400	19.800	8.800	6.100	4.400	9.200	6.600	4.400	4.400
PLGW U 1	1"-8		11.000	6.600	22.000	13.200	9.200	6.600	13.600	9.900	6.600	6.600
PLGW U 1 1/4	1 1/4"-7		22.000	8.800	44.000	17.600	12.300	8.800	18.000	13.200	8.800	8.800
PLGW U 1 1/2	1 1/2"-6		33.000	15.400	66.000	30.800	21.500	15.400	32.300	23.100	15.400	15.400
PLGW U 1 3/4	1 3/4"-5		40.000	19.800	80.000	39.600	27.700	19.800	41.500	29.700	19.800	19.800

Safety factor 4

Attention: Subject to technical changes!

Permissible usage

Load capacity acc. to the inspection certificate table of WLL in the shown directions of pull (see picture 3).

- Adjust the lifting point in the permitted load direction before loading
- Loadable with a 4-fold safety under break in all directions

Non permissible usage

Make sure when choosing the assembly that improper loading can not arise e.g. if:

- The direction of pull is obstructed
- Direction of pull is not in the foreseen area (see picture 4)
- Loading ring rests against edges or loads

For more details please reference our user manual.

To calculate the necessary thread length (L):

$$L = H + S + K + X$$

H = Material height

S = Thickness of the washer

K = Height of the nut (depending on the thread size of the screw)

X = Excess length of the screw (twofold pitch of the screw)


L max. = n max.

In case of requesting a lifting point with a special thread length, please mention the requested thread length "L".

pewag provides, along with the standard and maximum thread lengths, specially customised thread lengths.

Supplied customised and maximum thread lengths include a washer and a crack-tested, corrosion-protected screw nut.



Each lifting point is marked with an individual serial number.



Picture 3



Picture 4

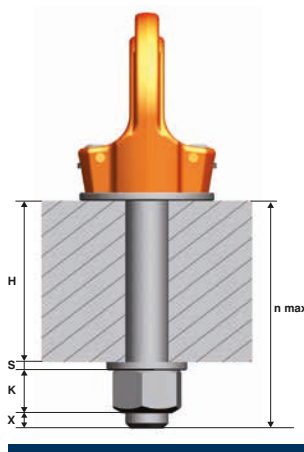

Code	Thread [mm]	Load capacity [kg]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	Ø f [mm]	n [mm]	n max. [mm]	Hex [mm]	Weight [kg/pc.]
PLGW 0,3 t	M8	300	25	45	10	27	53	35	15	90	6	0,17
PLGW 0,5 t	M10	500	25	45	10	27	53	35	15	160	6	0,18
PLGW 0,7 t	M12	700	30	55	12	32	63	43	20	160	8	0,29
PLGW 1,5 t	M16	1.500	35	64	14	36	70	50	25	160	10	0,45
PLGW 2 t (2,3 t)	M20	2.000	40	69	16	41	78	54	30	160	12	0,58
PLGW 3 t (3,2 t)	M24	3.000	50	86	18	50	93	69	35	-	14	1,10
PLGW 4 t (4,9 t)	M30	4.000	60	110	25	60	114	90	45	-	17	2,20
PLGW 7 t	M36	7.000	70	132	31	70	136	108	55	-	19	3,90
PLGW 9 t	M42	9.000	80	152	36	72	153	126	65	-	22	5,80
PLGW 12 t	M48	12.000	95	179	42	88	179	148	75	-	24	8,90

Code	Thread [inch]	Load capacity [lbs]	a [inch]	b [inch]	c [inch]	d [inch]	e [inch]	Ø f [inch]	n [inch]	n max. [inch]	Hex [inch]	Weight [lbs/pc.]
PLGW U 3/8	3/8"-16	1.100	0,98	1,77	0,39	1,04	2,09	1,38	0,60	-	1/4"	0,40
PLGW U 1/2	1/2"-13	1.500	1,18	2,17	0,47	1,26	2,48	1,69	0,80	-	5/16"	0,64
PLGW U 5/8	5/8"-11	3.300	1,38	2,52	0,55	1,40	2,76	1,97	1,00	-	3/8"	0,99
PLGW U 3/4	3/4"-10	4.400	1,57	2,72	0,63	1,59	3,07	2,13	1,20	-	1/2"	1,28
PLGW U 1	1"-8	6.600	1,97	3,39	0,71	1,97	3,82	2,72	1,40	-	9/16"	2,43
PLGW U 1 1/4	1 1/4"-7	8.800	2,36	4,33	0,98	2,36	4,49	3,54	1,80	-	5/8"	4,85
PLGW U 1 1/2	1 1/2"-6	15.400	2,76	5,20	1,22	2,76	5,35	4,25	2,20	-	7/8"	8,60
PLGW U 1 3/4	1 3/4"-5	19.800	3,15	5,98	1,42	2,83	6,02	4,96	2,60	-	1"	12,80

Attention: Subject to technical changes!

PLGW-SN pewag winner profilift gamma supreme


pewag's new PLGW-SN pewag winner profilift gamma supreme lifting eye nut is the logical continuance to the successful PLGW product portfolio. This product is unsurpassed worldwide due to the main principle being based on tool-free installation. The product is used in those areas where a threaded bolt on the load is used instead of a simple thread. Furthermore, there is a possibility to mount the lifting point PLGW-SN with a commercially available (standard) screw through the clearance hole. The benefit of the PLGW-SN is that no matter the width of the load, the same lifting point can be used – all one needs are standard screws with different screw lengths. For more details, please refer to the instruction manual.

Further benefits of the PLGW-SN lifting points supreme are:


- Tools are not necessary for assembling or disassembling
- The time saving aspect especially when frequent (dis)assembling takes place
- Rotatable (load direction adjustment)
- In all directions loadable




Picture 1



Picture 2




Picture 3

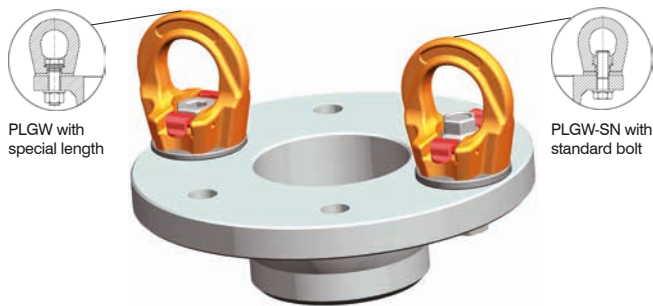

Applicaton 1: Employment PLGW or PLGW-SN




Application 2: Differing load thickness/width



Application 3: Available Threaded Bolts

Type of application
Number of legs
Angle of inclination

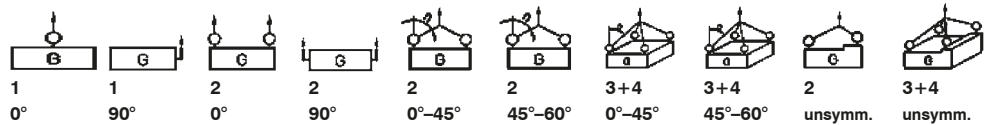

Code	Thread [mm]	Load capacity *									
		[kg]	[kg]								
PLGW-SN 0,3 t	M8	800	300	1.600	600	400	300	600	400	300	300
PLGW-SN 0,5 t	M10	1.100	500	2.200	1.000	700	500	1.000	700	500	500
PLGW-SN 0,7 t	M12	2.000	700	4.000	1.400	1.000	700	1.400	1.000	700	700
PLGW-SN 1,5 t	M16	4.000	1.500	8.000	3.000	2.100	1.500	3.000	2.200	1.500	1.500
PLGW-SN 2,3 t	M20	5.000	2.300	10.000	4.600	3.200	2.300	4.800	3.400	2.300	2.300
PLGW-SN 3,5 t	M24	6.500	3.500	13.000	7.000	4.900	3.500	7.400	5.200	3.500	3.500
PLGW-SN 4,9 t	M30	12.000	4.900	24.000	9.800	6.900	4.900	10.300	7.300	4.900	4.900

Code	Thread [mm]	Load capacity * [kg]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	Ø f [mm]	Hex [mm]	Weight [kg/pc.]
PLGW-SN 0,3 t	M8	300	25	45	10	21	55	35	12	0,17
PLGW-SN 0,5 t	M10	500	25	45	10	21	55	35	12	0,17
PLGW-SN 0,7 t	M12	700	30	55	12	25	65	43	14	0,28
PLGW-SN 1,5 t	M16	1.500	35	64	14	29	72	50	19	0,42
PLGW-SN 2,3 t	M20	2.300	40	69	16	34	80	54	22	0,50
PLGW-SN 3,5 t	M24	3.500	50	86	18	40	95	69	27	1,00
PLGW-SN 4,9 t	M30	4.900	60	110	25	47	115	90	36	2,00

* Load capacity only valid for crack tested screws with screw strength class at least 10.9

Comparison between PLGW/PLGW-SN pewag profilift gamma and eyebolt DIN 580

Why should I use PLGW pewag profilift gamma?


PLGW pewag profilift gamma supreme eyebolt resp. PLGW-SN pewag profilift gamma supreme eye nut		Eye bolt according to DIN 580 resp. Eye bolt according to DIN 582					
	Product	PLGW (SN)	DIN 580 / DIN 582		PLGW (SN)	DIN 580 / DIN 582	
	Thread size	M12	M12	1*) 2*)	M36	M36	1*) 2*)
	Nominal load capacity	0,7 t	0,34 t		7 t	4,6 t	
	Working load limit WLL	2 t	0,34 t	M30	15 t	4,6 t	M64
	Breaking load limit	8 t	2,04 t		60 t	27,6 t	
	WLL (< 45°)	0,7 t	0,24 t	M20	7 t	3,3 t	M56
	Breaking load limit (< 45°)	2,8 t	1,44 t		28 t	19,8 t	
	WLL (< 45° side loaded)	0,7 t	0,17 t	M24	7 t	2,3 t	M64
	Breaking load limit (< 45° side loaded)	2,8 t	1,02 t		28 t	13,8 t	

1*) What size DIN 580 is needed to carry the same load as the pewag profilift gamma (in the appropriate direction of loading).

Application: Single-sling, direct load, Load = 2 t.
 Required thread size pewag PLGW: M12
 Required thread size eye bolt acc. to DIN 580: M30

Application: Multi leg sling

2*) The carrying capacity of DIN 580 shall apply only if the screws are screwed in completely and rest on the load with the entire contact surface. Since it is very likely in this case, that at least one screw is loaded in the wrong direction, pewag recommends the adjustable eye bolts PLGW. Those can always be aligned in the tensile direction.




Size comparison PLGW M12 – DIN 580-M30

PLAW pewag winner profilift alpha

360° rotatable lifting point. The load ring is loadable in a range of 130° and can be positioned at any required angle due to its replaceable and patented spring. Likewise interchangeable is the hexagon-special screw from grade 10.9 material, which is secured against loss. The screw is 100% crack detection tested as well as covered with a chromate VI-free protection against corrosion, and marked with the load capacity and thread size.

pewag winner profilift alpha is able to withstand a 4-fold safety against break in all directions. Each lifting point is marked with an individual serial number that allows product traceability. pewag winner profilift alpha is available with metric or UNC-thread, whereas the lifting points with metric thread are also obtainable with customized thread lengths. The table with the working load limit depending on the type of application as lifting gear, number of legs and angle of inclination is a part of the user manual and packed together with each lifting point.

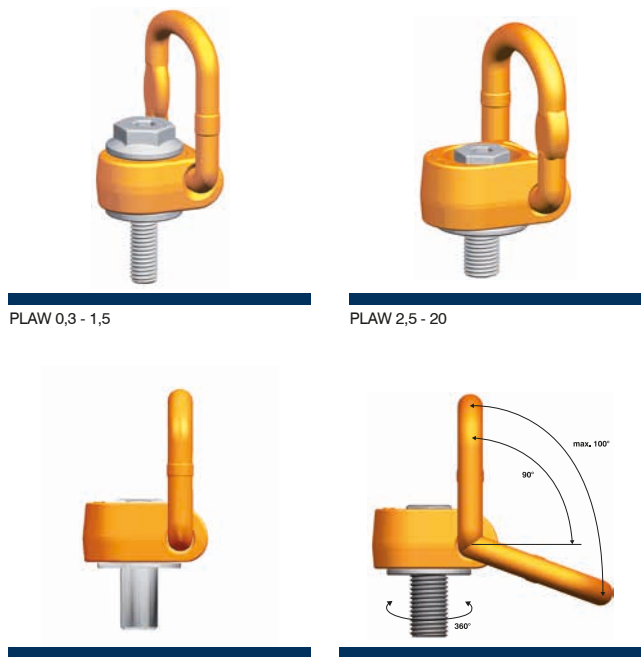

Picture 1: permissible usage

Method of lifting	1 leg		2 legs		2 legs		2 legs		3+4 legs		3+4 legs	
Number of legs	1	1	2	2	2	2	3+4	3+4	2	3+4		
Angle of inclination	0°	90°	0°	90°	0°-45°	45°-60°	0°-45°	45°-60°	unsymm.	unsymm.		

Code	Thread [mm]	Fastening torque [Nm]	Load capacity [kg]									
PLAW 0,3 t	M8	35	300	300	600	600	400	300	600	400	300	300
PLAW 0,63 t	M10	70	630	630	1.250	1.250	850	630	1.300	900	630	630
PLAW 1 t	M12	120	1.000	1.000	2.000	2.000	1.400	1.000	2.100	1.500	1.000	1.000
PLAW 1,5 t	M16	200	1.500	1.500	3.000	3.000	2.100	1.500	3.100	2.200	1.500	1.500
PLAW 2,5 t	M20	250	2.500	2.500	5.000	5.000	3.500	2.500	5.200	3.700	2.500	2.500
PLAW 4 t	M24	400	4.000	4.000	8.000	8.000	5.600	4.000	8.400	6.000	4.000	4.000
PLAW 6 t	M30	500	6.000	6.000	12.000	12.000	8.500	6.000	12.650	9.000	6.000	6.000
PLAW 7 t*	M36	700	7.000	7.000	14.000	14.000	9.800	7.000	14.700	10.500	7.000	7.000
PLAW 8 t	M36	800	8.000	8.000	16.000	16.000	11.200	8.000	16.800	12.000	8.000	8.000
PLAW 10 t	M42	1.000	10.000	10.000	20.000	20.000	14.000	10.000	21.000	15.000	10.000	10.000
PLAW 15 t	M42	1.500	15.000	15.000	30.000	30.000	21.000	15.000	31.500	22.500	15.000	15.000
PLAW 20 t	M48	2.000	20.000	20.000	40.000	40.000	28.000	20.000	42.000	30.000	20.000	20.000

Code	Thread [inch]	Fastening torque [lb/ft]	Load capacity [lbs]									
PLAW U 3/8	3/8"-16	51,6	1.350	1.350	2.700	2.700	1.800	1.350	2.800	1.900	1.350	1.350
PLAW U 1/2	1/2"-13	88,5	2.200	2.200	4.400	4.400	3.000	2.200	4.600	3.300	2.200	2.200
PLAW U 5/8	5/8"-11	148	3.300	3.300	6.600	6.600	4.600	3.300	6.800	4.800	3.300	3.300
PLAW U 3/4	3/4"-10	221	4.400	4.400	8.800	8.800	6.000	4.400	9.200	6.500	4.400	4.400
PLAW U1	1"-8	295	8.800	8.800	17.600	17.600	12.300	8.800	18.400	13.200	8.800	8.800
PLAW U1 1/4	1 1/4"-7	369	13.200	13.200	26.400	26.400	18.700	13.200	27.800	19.800	13.200	13.200
PLAW U1 1/2	1 1/2"-6	590	17.000	17.000	34.000	34.000	24.000	17.000	36.000	25.500	17.000	17.000
PLAW U1 3/4	1 3/4"-5	1.100	22.000	22.000	44.000	44.000	30.000	22.000	45.000	33.000	22.000	22.000

* Special models only available on request!
Safety factor 4

Attention: Subject to technical changes!

Permissible usage

Load capacity acc. to the inspection certificate respectively table of WLL in the mentioned directions of pull (see picture 1).

Non permissible usage

Make sure when choosing the assembly that improper load can not arise e.g. if:

- The direction of pull is obstructed
- Direction of pull is not in the foreseen area (see picture 2)
- Load ring rests against edges or load (picture 3)

The load ring must be placed in the direction of pull before loading – do not turn under load. For more details please have a look into our user manual.

To calculate the necessary thread length (L):

$$L = H + S + K + X$$

H = Material height

S = Thickness of the washer

K = Height of the nut (depending on the thread size of the screw)

X = Excess length of the screw (twofold pitch of the screw)


L max. = n max.

pewag provides, along with the standard and maximum thread lengths, specially customised thread lengths.



Supplied customised and maximum thread lengths include a washer and a crack-tested, corrosion-protected screw nut.



Picture 2



Picture 3

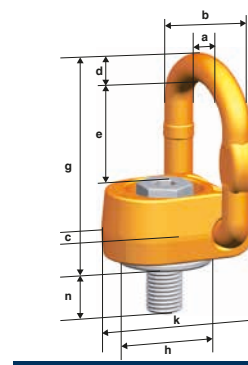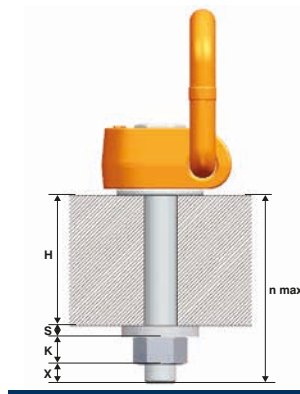

Code	Thread [mm]	Load capacity [kg]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	g [mm]	h [mm]	k [mm]	n [mm]	n max. [mm]	Hex [mm]	Hook [mm]	Weight [kg/pc.]
PLAW 0,3 t	M8	300	45	67	40	11	41	95	23	55	20	150	6	-	0,57
PLAW 0,63 t	M10	630	45	67	40	11	41	95	23	55	20	150	8	-	0,58
PLAW 1 t	M12	1.000	45	67	40	11	41	95	23	55	33	170	10	24	0,60
PLAW 1,5 t	M16	1.500	45	67	40	11	41	95	23	55	33	260	10	24	0,62
PLAW 2,5 t	M20	2.500	54	81	50	13	55	112	33	67	33	335	8	24	1,10
PLAW 4 t	M24	4.000	75	115	67	20	68	143	45	100	36	364	19	-	3,00
PLAW 6 t	M30	6.000	75	115	67	20	68	143	45	100	49	364	14	36	3,10
PLAW 7 t *	M36	7.000	75	115	67	20	65	143	45	100	55	-	27	-	3,30
PLAW 8 t	M36	8.000	93	147	85	27	85	188	52	120	55	365	19	36	6,10
PLAW 10 t	M42	10.000	93	147	85	27	85	188	52	120	65	365	32	-	6,40
PLAW 15 t	M42	15.000	115	181	105	33	108	246	63	150	63	340	19	55	12,0
PLAW 20 t	M48	20.000	115	181	105	33	108	246	63	150	73	340	19	55	12,3

Code	Thread [inch]	Load capacity [lbs]	a [inch]	b [inch]	c [inch]	d [inch]	e [inch]	g [inch]	h [inch]	k [inch]	n [inch]	n max. [inch]	Hex [inch]	Hook [inch]	Weight [lbs/pc.]
PLAW U 3/8	3/8"-16	1.350	1,77	2,64	1,57	0,43	1,61	3,74	0,91	2,17	0,79	-	5/16"	-	1,39
PLAW U 1/2	1/2"-13	2.200	1,77	2,64	1,57	0,43	1,61	3,74	0,91	2,17	1,30	-	3/8"	-	1,41
PLAW U 5/8	5/8"-11	3.300	1,77	2,64	1,57	0,43	1,61	3,74	0,91	2,17	1,30	-	1/2"	-	1,45
PLAW U 3/4	3/4"-10	4.400	2,13	3,19	1,97	0,51	2,17	4,41	1,34	2,64	1,30	-	9/16"	-	2,36
PLAW U1	1"-8	8.800	2,95	4,53	2,64	0,79	2,68	5,63	1,77	3,94	1,41	-	3/4"	-	6,40
PLAW U1 1/4	1 1/4"-7	13.200	2,95	4,53	2,64	0,79	2,68	5,63	1,77	3,94	1,93	-	7/8"	-	6,80
PLAW U1 1/2	1 1/2"-6	17.000	3,66	5,79	3,35	1,06	3,43	7,40	2,05	4,72	2,16	-	1"	-	14,40
PLAW U1 3/4	1 3/4"-5	22.000	3,66	5,79	3,35	1,06	3,43	7,40	2,05	4,72	2,55	-	1 1/4"	-	14,70


* Special models only available on request!

Attention: Subject to technical changes!

PLBW pewag winner profilift beta

360° rotatable lifting point. The load ring is 180° movable and can be positioned at any required angle due to its replaceable and patented spring. Likewise interchangeable is the hexagon-special screw of grade 10.9 material, which is secured against loss. The screw is 100% crack-tested as well as covered with a chromate VI-free protection against corrosion, and marked with WLL and thread size. It can be tightened with a hexagon wrench or spanner wrench.

The lifting points pewag winner profilift beta are marked with an individual serial number, that allows product traceability and load capacity for the most inappropriate field of operation, which explains the increased WLL in the upright loaded position. In permissible fields of operations the lifting point corresponds to a 5-fold safety. pewag winner profilift beta is available with metric or UNC-thread, whereas the lifting points with metric thread are also obtainable with customized thread lengths. The table with the different load capacities depending on the method of lifting as lifting gear, number of legs and angle of inclination is a part of the user manual and packed together with each lifting point.

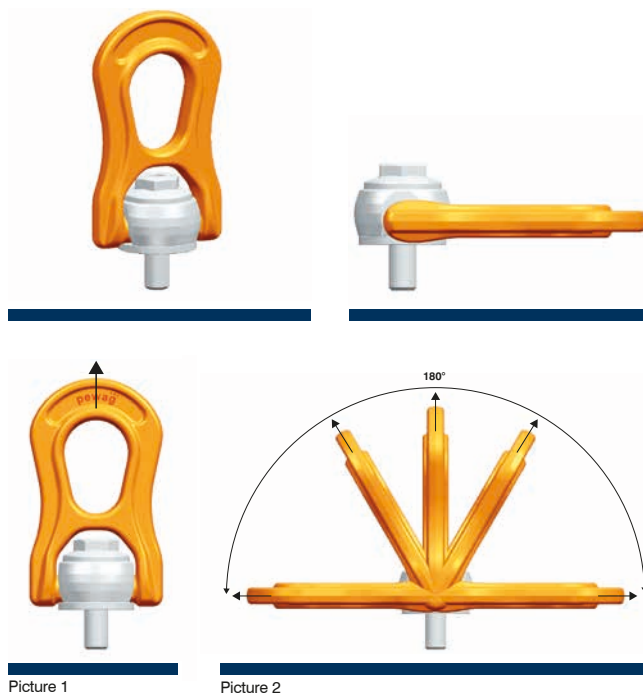

Method of lifting										
Number of legs	1	1	2	2	2	2	3+4	3+4	2	3+4
Angle of inclination	0°	90°	0°	90°	0°-45°	45°-60°	0°-45°	45°-60°	asymm.	asymm.

Code	Thread [mm]	Fastening torque [Nm]	Load capacity [kg]									
PLBW 0,3 t	M8	6	500	300	1.000	600	400	300	600	450	300	300
PLBW 0,6 t	M10	10	1.000	600	2.000	1.200	800	600	1.300	900	600	600
PLBW 1 t	M12	15	1.300	1.000	2.600	2.000	1.400	1.000	2.100	1.500	1.000	1.000
PLBW 1,3 t	M14	30	2.000	1.300	4.000	2.600	1.800	1.300	2.700	1.900	1.300	1.300
PLBW 1,6 t	M16	50	2.500	1.600	5.000	3.200	2.200	1.600	3.400	2.400	1.600	1.600
PLBW 2 t	M18	70	3.000	2.000	6.000	4.000	2.800	2.000	4.200	3.000	2.000	2.000
PLBW 2,5 t	M20	100	3.500	2.500	7.000	5.000	3.500	2.500	5.300	3.700	2.500	2.500
PLBW 3 t	M22	120	4.500	3.000	9.000	6.000	4.200	3.000	6.300	4.500	3.000	3.000
PLBW 4 t	M24	160	5.500	4.000	11.000	8.000	5.600	4.000	8.400	6.000	4.000	4.000
PLBW 5 t	M27	200	6.500	5.000	13.000	10.000	7.000	5.000	10.500	7.500	5.000	5.000
PLBW 6,3 t	M30	250	7.000	6.300	14.000	12.600	8.800	6.300	13.200	9.400	6.300	6.300
PLBW 8 t	M33	270	9.000	8.000	18.000	16.000	11.000	8.000	16.500	12.000	8.000	8.000
PLBW 10 t	M36	320	11.000	10.000	22.000	20.000	14.000	10.000	21.000	15.000	10.000	10.000
PLBW 12,5 t	M42	400	13.500	12.500	27.000	25.000	17.500	12.500	26.300	18.700	12.500	12.500
PLBW 15 t	M48	600	16.000	15.000	32.000	30.000	21.000	15.000	32.000	22.500	15.000	15.000

Code	Thread [inch]	Fastening torque [lb/ft]	Load capacity [lbs]									
PLBW U5/16	5/16"-18	4,5	1.100	660	2.200	1.320	900	660	1.400	900	660	660
PLBW U 3/8	3/8"-16	7,5	2.200	1.300	4.400	2.600	1.800	1.300	2.700	1.900	1.300	1.300
PLBW U 7/16	7/16"-14	11	2.800	2.200	5.600	4.400	3.000	2.200	4.600	3.300	2.200	2.200
PLBW U 9/16	9/16"-12	22	4.400	3.000	8.800	6.000	4.200	3.000	6.300	4.500	3.000	3.000
PLBW U 5/8	5/8"-11	37	5.500	3.500	11.000	7.000	4.900	3.500	7.300	5.200	3.500	3.500
PLBW U 3/4	3/4"-10	74	6.600	5.500	13.200	11.000	7.700	5.500	11.500	8.200	5.500	5.500
PLBW U 7/8	7/8"-9	118	12.000	8.800	24.000	17.600	12.300	8.800	18.500	13.200	8.800	8.800
PLBW U1	1"-8	148	13.000	11.000	26.000	22.000	15.400	11.000	23.000	16.500	11.000	11.000
PLBW U1 1/8	1 1/8"-7	185	14.300	13.500	28.600	27.000	18.900	13.500	28.300	20.200	13.500	13.500
PLBW U1 1/4	1 1/4"-7	200	19.800	17.500	39.600	35.000	24.500	17.500	36.700	26.200	17.500	17.500
PLBW U1 3/8	1 3/8"-6	236	24.000	22.000	48.000	44.000	30.800	22.000	46.200	33.000	22.000	22.000
PLBW U1 1/2	1 1/2"-6	295	25.000	24.000	50.000	48.000	33.600	24.000	50.400	36.000	24.000	24.000

Safety factor 5

Attention: Subject to technical changes!

Permissible usage


Load capacity acc. to the inspection certificate respectively table of WLL in the mentioned directions of pull (see picture 1 and 2).

Non permissible usage


Make sure when choosing the assembly that improper load can not arise e.g. if:

- The direction of pull is obstructed
- Direction of pull is not in the foreseen area (see picture 3)
- Loading ring rests against edges or load (picture 4)

The load ring must be placed in the direction of pull before loading – do not turn under load. For more details please have a look into our user manual.



Picture 3





Picture 4

To calculate the necessary thread length (L):

$L = H + S + K + X$

- H = Material height
- S = Thickness of the washer
- K = Height of the nut (depending on the thread size of the screw)
- X = Excess length of the screw (twofold pitch of the screw)
- L max. = n max.

pewag provides, along with the standard and maximum thread lengths, specially customised thread lengths. Supplied customised and maximum thread lengths include a washer and a crack-tested, corrosion-proofed screw nut.

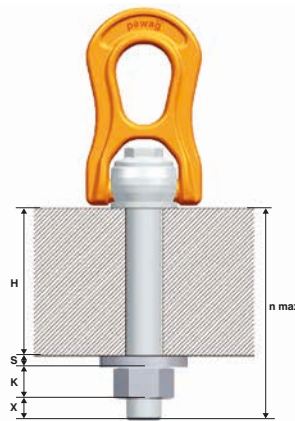

Code	Thread [mm]	Load capacity [kg]	a [mm]	b [mm]	c [mm]	e [mm]	f [mm]	g [mm]	h [mm]	n [mm]	n max. [mm]	Hex [mm]	Eye [mm]	Weight [kg/pc.]
PLBW 0,3 t	M8	300	29	56	30	38	18	27	94	13	80	8	15	0,32
PLBW 0,6 t	M10	600	29	56	30	38	18	27	94	15	100	8	15	0,33
PLBW 1 t	M12	1.000	29	56	30	38	18	27	94	17	180	8	15	0,34
PLBW 1,3 t	M14	1.300	43	79	45	55	25	38	138	22	220	10	24	1,03
PLBW 1,6 t	M16	1.600	43	79	45	55	25	38	138	24	260	10	24	1,04
PLBW 2 t	M18	2.000	43	79	45	55	25	38	138	27	295	10	24	1,07
PLBW 2,5 t	M20	2.500	43	79	45	55	25	38	138	30	335	10	24	1,08
PLBW 3 t	M22	3.000	64	118	68	85	38	58	209	33	355	14	36	3,50
PLBW 4 t	M24	4.000	64	118	68	85	38	58	209	36	355	14	36	3,53
PLBW 5 t	M27	5.000	64	118	68	85	38	58	209	40	355	14	36	3,58
PLBW 6,3 t	M30	6.300	64	118	68	85	38	58	209	45	355	14	36	3,66
PLBW 8 t	M33	8.000	106	188	108	132	60	91	331	54	328	19	55	14,50
PLBW 10 t	M36	10.000	106	188	108	132	60	91	331	59	328	19	55	14,60
PLBW 12,5 t	M42	12.500	106	188	108	132	60	91	331	69	328	19	55	14,90
PLBW 15 t	M48	15.000	106	188	108	132	60	91	331	74	328	19	55	15,20


Code	Thread [inch]	Load capacity [lbs]	a [inch]	b [inch]	c [inch]	e [inch]	f [inch]	g [inch]	h [inch]	n [inch]	n max. [inch]	Hex [inch]	Eye [inch]	Weight [lbs/pc.]
PLBW U5/16	5/16"-18	660	1,14	2,20	1,18	1,50	0,71	1,06	3,70	0,51	-	5/16"	5/8"	0,71
PLBW U3/8	3/8"-16	1.300	1,14	2,20	1,18	1,50	0,71	1,06	3,70	0,59	-	5/16"	5/8"	0,73
PLBW U7/16	7/16"-14	2.200	1,14	2,20	1,18	1,50	0,71	1,06	3,70	0,67	-	5/16"	5/8"	0,75
PLBW U9/16	9/16"-12	3.000	1,69	3,11	1,77	2,17	0,98	1,50	5,43	0,87	-	5/16"	1"	2,27
PLBW U5/8	5/8"-11	3.500	1,69	3,11	1,77	2,17	0,98	1,50	5,43	0,95	-	5/16"	1"	2,29
PLBW U3/4	3/4"-10	5.500	1,69	3,11	1,77	2,17	0,98	1,50	5,43	1,19	-	5/16"	1"	2,38
PLBW U7/8	7/8"-9	8.800	2,52	4,65	2,68	3,35	1,50	2,28	8,23	1,44	-	9/16"	1 3/8"	7,78
PLBW U1	1"-8	11.000	2,52	4,65	2,68	3,35	1,50	2,28	8,23	1,59	-	9/16"	1 3/8"	7,89
PLBW U1 1/8	1 1/8"-7	13.500	2,52	4,65	2,68	3,35	1,50	2,28	8,23	1,79	-	9/16"	1 3/8"	8,07
PLBW U1 1/4	1 1/4"-7	17.500	4,17	7,40	4,25	5,20	2,36	3,58	13,03	2,13	-	3/4"	2 3/16"	32,00
PLBW U1 3/8	1 3/8"-6	22.000	4,17	7,40	4,25	5,20	2,36	3,58	13,03	2,32	-	3/4"	2 3/16"	32,20
PLBW U1 1/2	1 1/2"-6	24.000	4,17	7,40	4,25	5,20	2,36	3,58	13,03	2,72	-	3/4"	2 3/16"	32,80

Attention: Subject to technical changes!

PLDW pewag winner profilift delta

Ball-bearing 360° under load rotatable lifting point. High resistant lifting eye 180° movable. The special screws are 100% crack-tested as well as protected against corrosion, and marked with WLL and thread size. Each lifting point is marked with an individual serial number, that allows traceability. The table with the load capacities depending on the method of lifting as lifting gear, number of legs and angle of inclination is a part of the user manual and packed together with each lifting point.

The pewag winner profilift delta lifting points are marked with a WLL for the most inappropriate field of application, which explains the increased WLL in the upright loaded position, with a 4-fold safety against break in all directions of load.

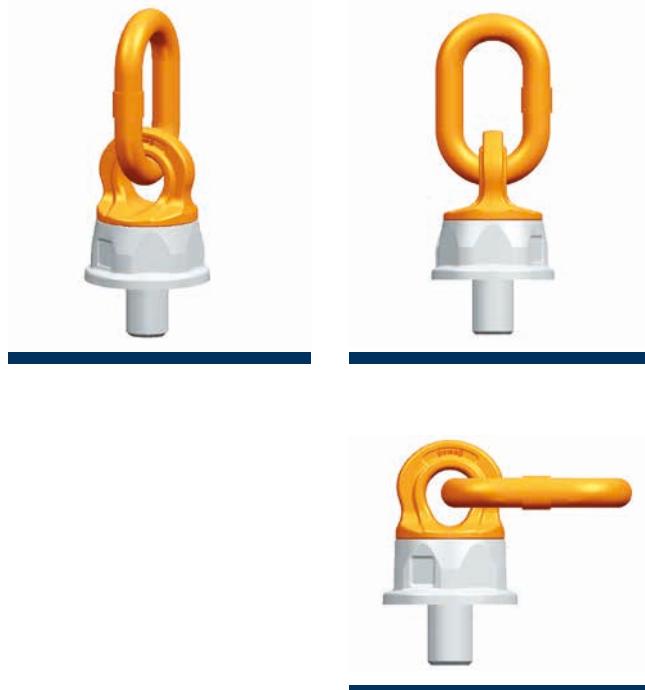

Method of lifting										
Number of legs	1	1	2	2	2	2	3+4	3+4	2	3+4
Angle of inclination	0°	90°	0°	90°	0°-45°	45°-60°	0°-45°	45°-60°	asymm.	asymm.

Code	Thread [mm]	Fastening torque [Nm]	Load capacity [kg]									
			600	300	1.200	600	400	300	600	400	300	300
PLDW 0,3 t	M8	10	600	300	1.200	600	400	300	600	400	300	300
PLDW 0,5 t	M10	10	1.000	500	2.000	1.000	700	500	1.000	750	500	500
PLDW 0,7 t	M12	15	1.400	700	2.800	1.400	950	700	1.400	1.000	700	700
PLDW 1 t*	M14	25	2.000	1.000	4.000	2.000	1.400	1.000	2.100	1.500	1.000	1.000
PLDW 1,5 t	M16	30	2.600	1.500	5.200	3.000	2.100	1.500	3.100	2.100	1.500	1.500
PLDW 2,5 t	M20	80	4.500	2.500	9.000	5.000	3.500	2.500	5.300	3.500	2.500	2.500
PLDW 4 t	M24	150	7.000	4.000	14.000	8.000	5.500	4.000	8.400	6.000	4.000	4.000
PLDW 6 t	M30	230	10.000	6.000	20.000	12.000	8.400	6.000	12.600	9.000	6.000	6.000
PLDW 8 t	M36	450	12.500	8.000	25.000	16.000	11.200	8.000	16.800	12.000	8.000	8.000
PLDW 10 t	M42	600	16.000	10.000	32.000	20.000	14.000	10.000	21.000	15.000	10.000	10.000
PLDW 12,5 t	M48	600	16.000	12.500	32.000	25.000	17.500	12.500	26.200	18.000	12.500	12.500

* Special models only available on request!

Attention: Subject to technical changes!

Safety factor 4
Availability on request!

Permissible usage


Load capacity acc. to the inspection certificate respectively table of WLL in the mentioned directions of pull (see picture 1).

Non permissible usage


Make sure when choosing the assembly that improper load can not arise e.g. if:

- The direction of pull is obstructed
- Direction of pull is not in the foreseen area (see picture 2)
- Loading ring rests against edges or load


For more details please have a look into our detailed user manual.




Picture 1



Picture 2

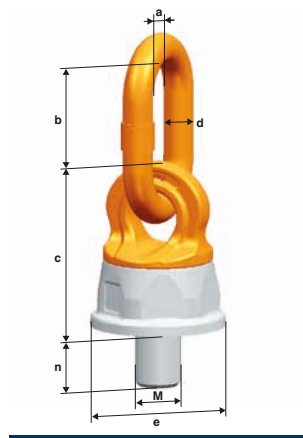

Code	Thread [mm]	Load capacity [kg]	a [mm]	b [mm]	c [mm]	Ø d [mm]	Ø e [mm]	n [mm]	 [mm]	Weight [kg/pc.]
PLDW 0,3t	M8	300	30	38	54	13	38	20	34	0,47
PLDW 0,5t	M10	500	30	38	54	13	38	20	34	0,47
PLDW 0,7t	M12	700	35	48	54	13	38	22	34	0,47
PLDW 1t *	M14	1.000	35	48	54	13	38	22	34	0,47
PLDW 1,5t	M16	1.500	35	48	54	13	38	33	34	0,49
PLDW 2,5t	M20	2.500	35	55	75	16	55	33	46	1,10
PLDW 4t	M24	4.000	40	66	82	17	63	40	50	1,50
PLDW 6t	M30	6.000	50	70	92	23	72	40	60	2,50
PLDW 8t	M36	8.000	50	91	124	23	92	55	75	4,30
PLDW 10t	M42	10.000	65	91	124	27	92	60	75	5,10
PLDW 12,5t	M48	12.500	65	116	124	27	92	68	75	5,40

* Only on request!

Availability on request!

Attention: Subject to technical changes!