

# Lastauslaituri- nostopöydät



# UC60 is the brain in EdmoLift's lifting tables



**UC60**  
Universal control that replaces 60 previous devices



**EASIER**  
With one standard M12 connector you can connect virtually anything. No electrician needed



**ECONOMIC**  
Replaces large wall cabinets or free-standing electric cabinets



**CUSTOMISED**  
Can be programmed to meet customers' special needs.



**DEVELOPABLE**  
Can be expanded to include new functions after purchase.

**UC60 IS THE NAME OF THE** small electronic control box that controls EdmoLift's products and replaces a total of 60 previous electrical devices.

"Our solution is unique in the industry," says Tobias Svensson, project manager.

The idea for the UC60 was hatched at the beginning of the twenty-first century, when customer needs gave rise to more and more advanced electronic devices. The choice to use M12 contacts was an obvious one in view of the large range of connectable components that were already on the market.

"Using the Plug-and-Play feature, each operator can easily connect equipment without having to engage a qualified electrician. This may be extra control units, sensors or other devices. The operator can even install desired functions, such as the upper and lower limit switches.

**SINCE 2011**, UC60 has been standard in EdmoLift's products and, in many cases, replaces large wall cabinets or free-standing electrical cabinets. Two models of UC60 are

available, standard and advanced. Both models have 15 program locations for standard designs and one program location dedicated to customer-specific solutions.

The advanced model has more inputs and outputs and also upgraded software that provides enhanced programming options. This meets the needs of those customers with a great deal of complexity in their use of peripheral equipment.


"We customise software and peripherals, based on the customer's needs. If a need is unique, a customer-unique program is delivered. But if the same need proves to be recurring, we add it as a standard program location.

**ANOTHER HANDY** feature is that the UC60 communicates with the operator using a buzzer that produces noises for various operations. In this way it is possible, for example, to get telephone support when accessories are installed. The customer can then often receive direct advice about what has to be done, without having to wait for a service technician.

# UC60

## Smart Lifting Solutions

# ONE BOX, 60 SOLUTIONS

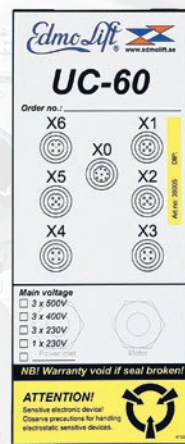

## UC60 IS THE RESULT

of several years of development work to simplify the connection of the various devices to EdmoLift's products. UC60 makes it easy to install accessories, increases safety and simplifies servicing on the products. UC60 is equipped with M12 connectors and a wide range of plug-and-play devices are available.

Tobias Svensson  
Project manager


# HOW TO CHOOSE THE RIGHT LIFT TABLE

## EDMOLIFT HAS LIFT TABLES FOR ALL CONDITIONS

Lift tables are used for various tasks and in many areas and it is difficult to produce a lift table in standard design for all types of use. EdmoLift has a very wide range of lift tables and accessories which makes it possible to find combinations that are suitable for most conditions.

Lift tables are of standard design fitted for good and prolonged function in "normal" operation. In intensive use with heavy loads, fast speed, tough environment, and perhaps more shifts requires that the lift table sometimes is oversized and HD-equipped. The lift tables electrical equipment is delivered as standard in protection class IP54. Tables for outdoor use must be fitted with anti-slip protection such as a tear plate, in accordance with the safety standards.

### Maximum load = distributed load

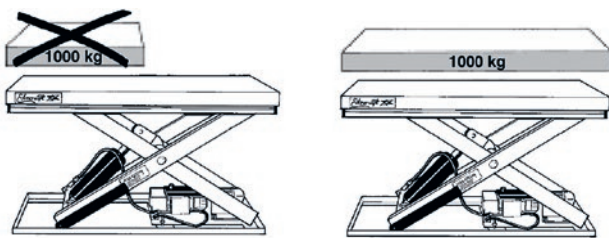

## IMPORTANT ASPECTS WHEN SELECTING LIFT MODEL AND PERFORMANCE

**Here are the prerequisites that you should take into consideration when choosing a lift table.**

### LOADING

Maximum load, weight distribution, bumps and knocks, twisting or side loading, point loading, distributed load, driving over with forklift trucks or lorries, the direction of movement of the load on roller conveyor

### INTENSITY

The speed, how often the lift table will move, how many intervals, how many lifting movements/year, automated operation of system

### PRECISION

Limit switch, upper-lower, precise stop is required, it is required that the lift table should remain in the exact position for a long time.

### ENVIRONMENT

Outdoor installation, pit mounting, moisture, cold, dust, heat, chemicals, regulatory requirements

### SAFETY

Risk of explosion, emergency operation, anti-slip protection, roll-over risk, control options, risk of crushing

### ERGONOMICS

Accessories can further enhance the workplace, such as tilting platform with load restraint or turntable

## Type designations and lift capacity

The type designations and lift capacity of EdmoLift lift tables apply in accordance with the following examples:

- ▶ Single scissor TL 2000 = max. load 2,000 kg distributed load
- ▶ Vertical double scissor TLD 2000 = max. load 2,000 kg distributed load, double lift height
- ▶ Horizontal double scissor TLH 2000 = max. load 2,000 kg distributed load, double length of platform
- ▶ In intensive use the lift table is HD-equipped
- ▶ EdmoLift lift tables meets all safety regulations for lifting table in Europe:
  - The EN 1570-1 standard
  - The Machinery Directive
  - The Low Voltage Directive
  - The EMC Directive
  - Safety of machinery - Electrical equipment of machines - General requirements EN-60204-1
- ▶ The lift tables electrical equipment is delivered as standard in protection class IP54. Tables for outdoor use must be fitted with anti-slip protection, such as a tear plate, in accordance with the safety regulations.



The CE label on EdmoLift's products indicates that the product is in compliance with applicable EU directives.

## Heavy-Duty-equipped lift table for intensive use

Lift tables are of standard design fitted for good and prolonged function in "normal" operation. In intensive use with heavy loads, fast speed, tough environment and perhaps more shifts requires that the lift table sometimes is oversized and HD-equipped (Heavy-Duty).



Lift table fitted with guard rails, gate, loadflap and protective wire mesh.

# PIT DRAWING AND SURFACE TREATMENT

## INSTALLATION OF A LIFT TABLE IN A PIT

When a lifting table is installed in a pit, the pit should be constructed according to the illustration on the right.

B = Width of the platform  
L = Length of the platform  
H = Lowest height of the lift table

The pit's ballast material must at least meet the concrete classification C12/15.


The hydraulic power pack for lifting tables in an outdoor environment should, where possible, be externally located in a covered or indoor environment.

1. Pipe for incoming cables, 100 mm in diameter. The fixed side of the lift table, B1, placed against this edge.


2. Drainage holes where required. This the third section in the centre of the pit should be 80 mm lower than H.

3. L-shaped profile 100 x 100 mm to reinforce the pit edges.

The pit drawing is not designed for low profile lifting tables.

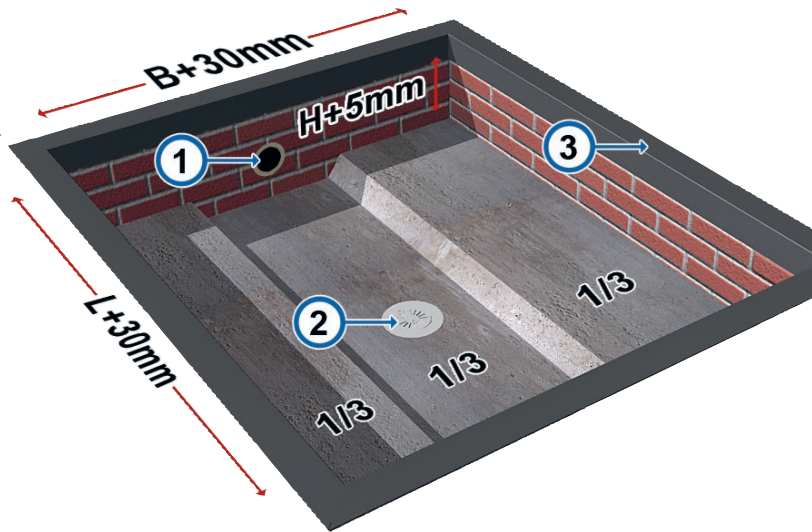

Fixed side of the lift table, B1



## RECOMMENDED ACCESSORY FOR PLACEMENT IN A PIT

When a lifting table is installed in a pit, we recommend the following accessories:

- Upper limit switch (page 65)

- Lifting eye bolts (page 65)
- Mechanical stop (page 66)
- Inspection hatch in the platform (page 66), or external hydraulic power pack (page 65)

- If the lift table is to be placed in exposed or harsh environments, we recommend surface treatment with corrosion class C4 medium

## SURFACE TREATMENTS THAT PROTECT YOUR LIFT TABLE

Products from EdmoLift can be delivered in a range of different RAL colours and finishes. Most of our products are powder coated in our own paint shop with a polyester based powder, which gives a surface with good wear and corrosion resistance.

### CHOICE OF RAL COLOURS

Besides EdmoLift's standard colours we can also offer all RAL colours. If two colours are chosen they should interact.

### ANTI-SLIP TEXTURED PAINT

If the platform is powder coated with textured paint, it takes on a sandpaper-like surface which provides excellent grip.

### CORROSION PROTECTION

We offer powder coating with a primer that gives the product corrosion class C4 medium, in accordance with the standard SFS-EN ISO 12944-6. EdmoLift's products are delivered with corrosion class C3 medium as standard. Powder coated corrosion protection is greener, more economical and better looking than galvanized, at the same time as it may shorten the lead time by up to two weeks. We can also offer galvanisation if desired.



EdmoLift's standard colours (orange RAL 2010, blue RAL 5002, grey RAL 7024, black RAL 9005). In addition to these, EdmoLift offer more than 200 RAL colours. With the option, textured paint the surface has a very good anti-slip protection.



A powder coated surface is durable and provides very good corrosion protection.

# UC60 – PLUG AND PLAY

## COMPACT AND SIMPLE ELECTRICAL SYSTEM WITH PLUG AND PLAY FUNCTIONALITY

Our lift tables are fitted with the unique and proprietary electrical system UC60. For you as a customer this offers great benefits as you can easily retrofit our various accessories.

UC60 has M12 connectors and the built-in plug-and-play feature allows the operator himself, without hiring a qualified electrician, to plug in a wide range of accessories. Some examples of accessories that can be installed are extra control units, sensors and extension cables.

When installing accessories the control unit's built-in buzzer feedbacks to the operator to confirm that the installation was successful. In case of any problems the buzzer function makes it possible to obtain phone support where a technician from EdmoLift can hear the sound of what needs to be addressed.

### STANDARDS

**UC60 meets the following standards:**

- EN 61000-6-2 (immunity)
- EN 61000-6-4:2007 EMC (radiation)
- 2014/30/EC
- EN 60204-1
- EN ISO 13850:2007

### TECHNICAL DESCRIPTION

**Standard operational voltages:**

- 1 phase 230VAC, 3 phase 230VAC
- 3 phase 400VAC, 3 phase 500VAC
- Stabilised 24VDC, 60VA transformer

**IP classification:**

IP54, M12 connectors IP67

**Dimension electric box:**

L:270 x H:85 x W:135 mm

### EXAMPLE OF CONNECTIONS

(standard lift table)

- X0 Control unit
- X1 Power pack valve / Hose burst valve
- X2 N/A
- X3 End limit switches
- X4 Passable limit switches
- X5 N/A
- X6 Safety frame + Hose burst valve



# SAFETY REGULATIONS FOR LIFT TABLES

## EDMOLIFT MEETS ALL SAFETY REQUIREMENTS FOR EUROPE


EdmoLift lift tables and pallet lifters meet all safety regulations for lift tables in Europe e.g. AFS 2012:2 in Sweden and the EN 1570-1-standard. The CE label on EdmoLift's products indicates that the product is in compliance with applicable EU directives. The lift table is as standard equipped with 400/24V low voltage 24V on the control unit, valve and switch for safety frame.

### Built-in safety function in safety frame

If the safety frame is triggered when descending the lift table stops immediately. To continue lowering the lift table, it must be driven up a bit to activate descent. Lift tables are always supplied with a "deadman's switch" type of control unit.

This means that when the up or down button is released the platform stops immediately. The control unit is equipped with an emergency stop and lock.

During installation of the lifting equipment, the installer and employee must ensure that the risk of crushing cannot occur.

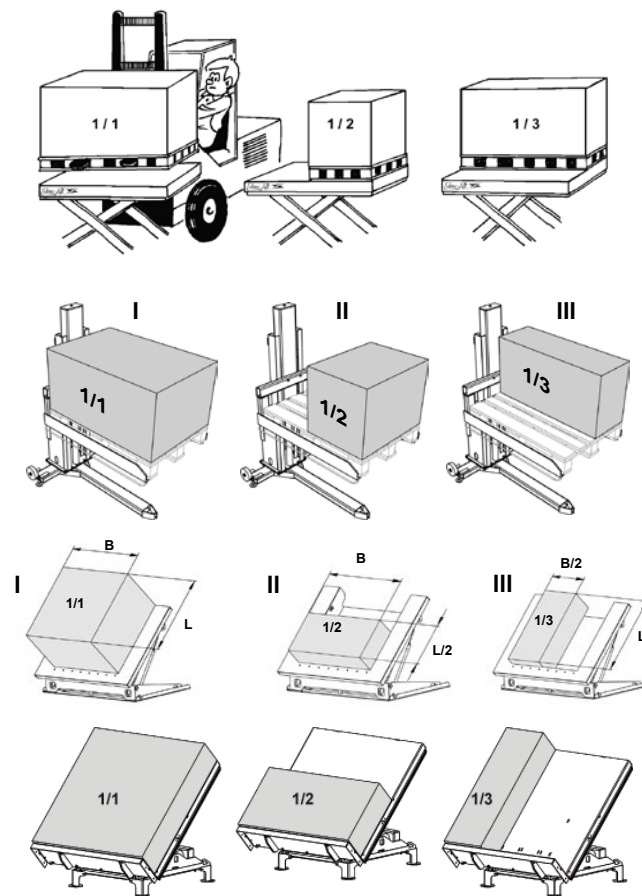

The stated lifting capacity of the lift table and pallet lifter required distributed load. TSL: Max. load = load centre 600 mm from column.

## INTERNAL CONTROL OF THE WORKPLACE'S SAFETY

**The employer is obligated to ensure that the equipment is used by competent staff and that control and maintenance of lifting equipment is carried out to the required extent.**

Control and maintenance takes place in accordance with the Swedish Work Environment Authority's Statute Book: Internal control of loading ergonomics AFS2012:2 as well as that:

1. Maximum load of lifting equipment is not exceeded. The load is fixed and cannot roll off. **MAXIMUM LOAD = DISTRIBUTED LOAD!**

2. Function of safety frame and safety spacing around the equipment is checked.  
3. Statutory warning labels are kept intact.  
4. Any loading injuries are checked.  
5. Cables and hoses are checked and maintained.  
6. Oil leakage and possible further spread are checked. Lubricate where required.  
7. Lift tables and pallet lifters are cleaned and serviced.  
8. Main power switch is available to authorized staff. The lifting equipment must not be used by unauthorised persons.

9. The platform is fitted with roll-off guard for the transportation of wheeled loads or loads that could roll.  
10. Tables for outdoor use are provided with anti-slip protection, such as tear plate, in accordance with the applicable safety standards.  
11. Tilting table platforms are provided with load restraint for securing load.  
12. That the required protective equipment, such as a guard rail, exist if a person besides the operator is included on the lift table.

13. Lift tables that are to be entered by persons equipped with anti-slip protection when there is a risk of slipping.  
14. The carriage of passengers may therefore only take place in designated lift tables, see the lift tables signage.  
15. No hands or feet are under the platform.



## CE INSTRUCTIONS

All machines shall be provided with fully legible and indelible marking that includes at least the following information:

- CE mark or manufacturing declaration
- Serial number and type designation
- Year of manufacture
- IP class
- Category class

Preferably EdmoLift's standard machine signs should be used. They are individually made for each machine. If the machine is manufactured for use in potentially explosive environments (EX) this must be specified on the machine. The machine is also provided with all information that is relevant to the type of machine concerned and which is needed for it to be used in a safe way.

## INTRODUCTION

User instructions provide complete information about the product, its installation, operation, care and maintenance as well as safety aspects for installation, use and dismantling. The instructions are written on EdmoLift's standard paper, in accordance with the instructions below. Basically, however, a handbook is generally included, which is supplemented as required. The authorised signatory of the EU Declaration of Conformity determines whether the handbook and any supplements are sufficient or not. When drafting new instructions based on standard products the Sales Department are contacted for support for the instructions.

## USER MANUAL GENERAL

The product is described in those parts that are deemed essential for use, installation, maintenance and service. The description is as far as possible illustrated. The instructions also specify how the machine must not be used through the addition that all other use is not allowed without EdmoLift's permission. Furthermore, it is pointed out that modifications are also not allowed without permission.

## GENERAL

An EU Declaration of Conformity has been drawn up for the machine, both for the larger machinery and safety components. The declaration is in the language of the user instructions and is accompanied by a translation

## LOAD FACTORS FOR LIFT TABLES

	DYNAMIC FACTOR	HORIZONTAL LOAD COEFFICIENT (in % of rated load)	LIFETIME <sup>B</sup> minimum load cycles under full load (x10 <sup>3</sup> )	INFORMATIVE EXAMPLE OF USE
1	1,4	10%	128 <sup>A</sup>	Lift tables for general use.
2	1,1	2,5%	8	Lift tables with a clearly defined lifting load and where other forces can be excluded; height adjustment without systematic lateral forces.
3	1,2	5,0%	32	Lift tables suitable for use in manual work, such as height-adjustable workstations.
4	1,3	10%	128	Lift tables suitable for driving over by e.g. forklift trucks or electric pallet stacker with a maximum braking force at 10%. Lift tables with unpowered roller belts.
5	1,4	10%	512	Lift tables suitable for a high number of lifting cycles.

When a vehicle crosses the lift table or the lift table is integrated in a management system, the lateral forces have to be verified in individual cases. Higher horizontal load coefficients have to be established if required.

<sup>A</sup> This minimum number of cycles shall be increased by the manufacturer according to the purpose of use of the lift table.

<sup>B</sup> When used (load cycle) according to lifting categories lifetime of lifting tables is generally 10 years when maintained in accordance with the manufacturers instructions.

into the language of the country where the machine will be used. The EU Declaration of Conformity is either typewritten or handwritten in capital letters. Attached under this tab is EdmoLift's standard form and authorisation for signatory of declaration of conformity or manufacturer's declaration.

## MANUFACTURER DECLARATION

In cases where the machine will be part of a larger machine or installation, or if it is delivered incomplete, for example lacking control system, power pack or upper platform, instead of an EU Declaration of Conformity, a manufacturer's declaration is issued, that is a message that the machine must not be brought into service until the machine into which it will be incorporated has been declared to be in conformity with the provisions of this Directive.

The machine plate may not be provided with a CE mark.

## EN 1570-1

EdmoLift lifting tables are designed and constructed to be safe, reliable and hard-wearing tools. In its basic version, EdmoLift lifting tables meet the basic requirements according to the lifting table standard EN 1570-1. This European Standard specifies the safety requirements for lifting tables that are used for lifting and/or lowering of material and/or trained persons accompanying the lifting table. The lift table must have two stop levels and may not pass in

between.

From the lifting tables standard EN 1570-1 (lift tables provide up to two fixed stop levels) the following points are particularly important:

5.1.2.4 The dynamic forces that are to be used for the calculations in accordance with 5.1.2.3 should at least consist of:

- the total vertical load (this includes maximum load and self-weight of the moving parts of the construction) increased by the dynamic factor for this lifting category in accordance with Table 2 as well as the horizontal load coefficient in accordance with Table 2, acting horizontally in platform level, in the direction causing the maximum stress to the part that is calculated.

If barriers prevent loading and unloading from one side of the platform or if the platform is otherwise blocked from moving in a direction, the horizontal load coefficient does not need to be considered in that direction.

5.1.2.5 If the platform is to be entered by operators, the weight of each person is assumed to amount to 80 kg distributed over an area of 0.2 x 0.2 m per person, with 0.5 m between each area's centre and placed in, from a the strength viewpoint, the most unfavourable position on the platform.

5.1.2.7.1 If the lift table is not designed for a specific load case, it must be designed for general loads in accordance with the basic requirements in the lift table

standard EN 1570-1:

- 100 % of maximum load uniformly distributed over the entire platform.
- or 50 % of load weight uniformly distributed over half of the platform area lengthwise.
- or 33 % of load weight uniformly distributed over half of the platform area sideways.

5.1.2.7.2 When the lift table is designed for a specific type of load case there should be a sign or instruction on the lift table which is clearly legible from the place of operation, displaying the intended load distribution.

### 5.1.3 Stability calculation

5.1.3.1 Lift tables must be stable (i.e. not be able to overturn) under all operating conditions, whether they are stationary or mobile.

The maximum permitted side force: 2.5-10% of the ground load, applied to the edge of the lift table.

Side forces occur, for example, when pressure is applied to the lifting table or the load by hand tools, or by pulling a tool or machinery part onto the platform. If the side force is applied to the load, the risk of tilting increases. Under no circumstances may risky tilting or downward bending occur when the lifting table is used in accordance with the manufacturer's instructions.

Side forces vary according to the above category table.



# Smart lift tables of the highest EdmoLift quality

## LIFT TABLES FOR ALL CONDITIONS AND EXTENSIVE ACCESSORIES PROGRAMME



Handling of engine parts at a European car manufacturer.

The lift tables is the core of EdmoLift's business. It began in 1964 with the single scissor lift table and since this we have developed tables that match most needs. Here you can find for example horizontal double scissors for long and heavy loads, vertical scissors for high lifting, low profile lift tables for efficient pallet handling and lorry loaders. If you have additional needs we can customize your lifting table.

### TWO PRODUCT SERIES – THE T AND C SERIES

Our lift tables and trolleys in the T-series are entirely Swedish-made and of the highest quality. As an example, the scissor arms on most lift tables in the T-series are made from KKR square bars in order to provide the very best lateral stability.

The models in the T-series can be adapted to meet your needs and are the best choice for demanding applications.

The C-series is our line of affordable lift tables that are made in Asia according to our designs, but are assembled and checked in our factory in Sweden.

The products in the C-series have Swedish-made electrical and hydraulic systems. C-series models come in standard sizes and can be equipped with a selection of accessories.

Model names beginning with the letter T belong to the T-series and those that start with C belong to the C-series.

### STANDARD FOR ALL LIFT TABLES

- ▶ Lift capacities from 200 kg up to 10,000 kg
- ▶ Lift platform lengths from 900 mm to 7,000 mm
- ▶ Extensive accessories programme and options of customer-adapted lift tables
- ▶ Complies with the EU standard EN 1570-1 – CE labelled
- ▶ 24VDC control unit and control unit with deadman's switch
- ▶ IP54 approved electrical system
- ▶ Safety spacing between all moving parts
- ▶ Overload protection
- ▶ Adjustable trap prevention safety trip bars on all four sides of the platform
- ▶ The lift table is equipped with hose burst valves and mechanical locks for servicing and maintenance
- ▶ The lift table has maintenance-free bearing surface
- ▶ PLC control with ability to program the different functions included in the standard design
- ▶ User manual in 22 different languages

## Lorry Loaders

Lorry loaders are used to facilitate the handling of different types of goods, such as pallets, carts, and containers between loading docks and ground level or between the loading dock and different types of transportation vehicles. A lorry loader can also be used to transport a truck between floor levels. Lorry loaders can be placed indoors in a weather-protected environment, under a canopy or in the open where they have to be running reliably during extreme operations and environmental conditions.

As the environments in which the lorry loaders are installed usually differ on a case-to-case basis, EdmoLift customizes the solution to suit the customer's specific needs to a competitive price. It is therefore utterly important that EdmoLift is provided with as much information as possible about the installation environment and what type of load the lorry loader will be lifting. EdmoLift can thereafter offer multiple lift table models within the T-series as lorry loaders.

On the following pages, we present some examples of different lift table models used as lorry loaders along with the accessories the solution has been equipped with. On the next pages you can also find some of the most common accessories that we recommend you to consider equipping your lorry loader with.



### TS 2001 INSTALLED IN A PIT

The lorry loader has an extended platform and is equipped with external power pack, upper limit switch and hydraulic loadflap. The lorry loader is also equipped with guard rails and a goal post, protective wire mesh.



## A selection of accessories for our Lorry Loaders

### Anti-slip platform

If the operator will be accessing the top of the lift table platform, it is required that the surface of the platform is equipped with an anti-slip protection. The tear plate platform provide the best anti-slip protection and is recommended for lift tables used outdoors. The chequered aluminium plate is screwed to the platform providing a non-slip, rust-protected surface. Textured paint provides a good anti-slip protection for dry environments.

4712	Tear plate platform	
4713	Chequered aluminium	
Platform with textured paint		



### Mechanical Stop

Used to fix and remove load from the lift table when it is driven over in the bottom position and when adjusting the height to meet roller belts. Adjustable +40 mm. Some tables require extension of the platform. Horizontal double scissors Requires two sets.




- ▶ Recommended for installation in pits

33900	Adjustable +40 mm	
-------	-------------------	--

### Lifting eye bolts

Lifting eye bolts make it safer and easier to install and transport the lift table. Lifts the base frame through the platform. Some tables require a larger platform. Horizontal double scissor require two sets.

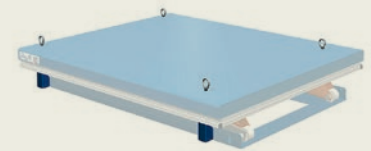


- ▶ Recommended for installation in pits

33960	4 x lifting eye bolts, max load up to → 4000 kg	
33960M20	4 x lifting eye bolts, max load from 4000 kg →	

### External power pack with steel cover

Provides additional protection in exposed environments.

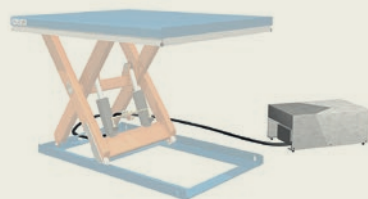

- ▶ Recommended for installation in pits

34197	External hydraulic power pack without cover, 3 m hose	
82614	Extra hose external hydraulic pack, price/meter	
34696	Steel cover for external power packs. H2, H3, H4, H6-4, H6-7	
34695	" " " " H6-11, H8-11	
34694	" " " " H11-11	
515004	" " " " H11-30, H15-30	
35003	" " " " H15-20	
35948	" " " " H15-50	

### Limit switch

The limit switch is adjustable and stops the lift at a pre-set height. Select the upper or lower limit, and whether there should be a function for passing the limit.

- ▶ When ordering, specify whether the switch should be for the upper or lower limit.
- ▶ If heights are notified when ordering, the lift table will be pre-set from the factory.
- ▶ Recommended for installation in pit.



### Hydraulic fluid

82289	Oil for use in - 20° / litre	
82581	Vegetable oil / litre	


515146	Limit switch single, double, triple scissor up to 3,000 kg	
32003	Limit switch double horizontal scissor up to 6,000 kg	
	Limit switch single, double, triple scissor over 3,000 kg	
	Limit switch double horizontal scissors up to 6,000 kg	

## A selection of accessories for our Lorry Loaders

### Guard rail with or without gate and goal post

Guard rails, gates and goal post are available in different sizes depending on the size of the lift table. The guard rail and gate height is 1100 mm with a 150 mm high kick board fitted underneath. The gate can be fitted with a manual or electric lock. Remember to indicate which side the gate should be fitted. See page 62 for more information.

36370	Guard rail 40 x 40 mm with a kick-plate 150 mm	
32467	Guard rail 30 x 30 mm with a kick-plate 150 mm	
36412	Gate with latch - 40 x 40 mm state hinge side max width 1200 mm	
33969	Gate with latch - 30 x 30 mm state hinge side max width 1200 mm	
36412-1	Gate prepared for interlock installation	
614808	Goal post, safety rail for dock side	

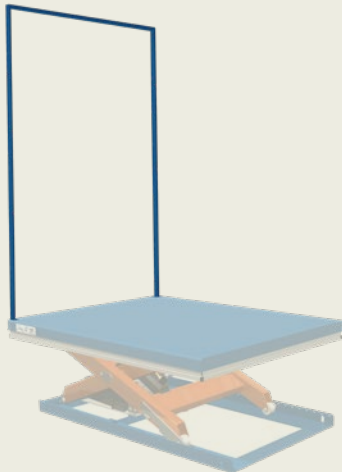

Goal post



Guard rail



Guard rail with gate



#### TS 2001B INSTALLED IN A PIT


The lorry loader is equipped with guard rails, gate with interlock and protective wire mesh, tear plate and an external gate on the loading dock.

## A selection of accessories for our Lorry Loaders

### Roll-off guard

Prevents the load rolling off the platform during loading or unloading. Roll-off guards can be supplied in manual or automatic versions. The automatic roll-off guard rises from the turntable when the lift table starts to elevate.


► Requires extension of the platform by 150 mm.

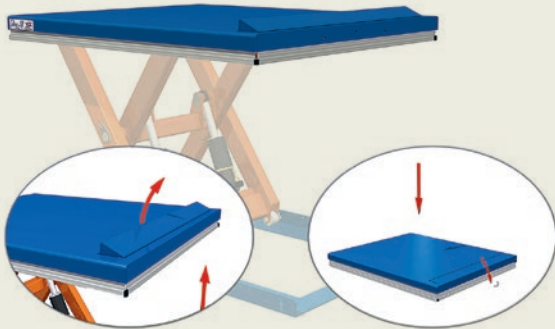

524818	Roll-off guard, automatic	Length	600 mm	
524820	"	"	700 mm	
524821	"	"	800 mm	
524822	"	"	900 mm	
524823	"	"	1000 mm	
524824	"	"	1100 mm	
524826	"	"	1200 mm	
33837	Roll-off guard, manual	Length	600 mm	
33838	"	"	800 mm	
33839	"	"	1100 mm	

### Loadflap manual / hydraulic

Used for bridging the gap between vehicle, loading dock or other storage area.

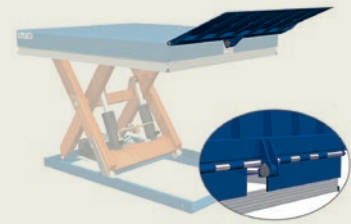

Manual and hydraulic loadflaps

### Inspection hatch in platform

Suitable for pit-mounted tables with built-in power pack

► Recommended for installation in pits




33975 Inspection hatch in platform

### Protective bellow and wire mesh

Bellow and mesh increase safety and protect the lift table from dust, dirt and debris in exposed environments. The bellow has to be fitted around the entire lift table, mesh can be fitted on either side. Requires an extended platform +75 mm on each side for fitting. Extension is not included in the price.


32466	Protective wire mesh, galvanised		
88337	Protective bellow PVC		

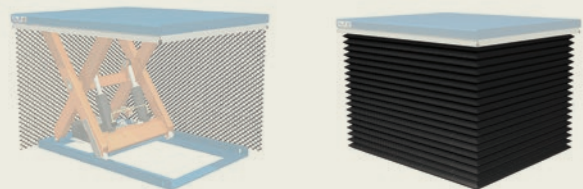

### Reinforced platform

A reinforced platform gives extra support to the lift table when driving over with forklift trucks and it prevents deformation.

82271	Thicker platform +2 mm, maximum thickness 8 mm		
34098	Reinforced platform for 5 tonne wheel pressure, increases the lift tables closed height by 100 mm. Mechanical stops need to be added.		

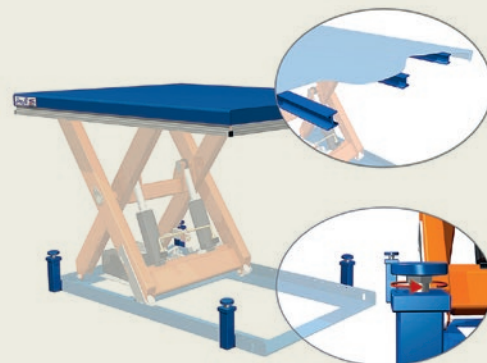

## A selection of accessories for our Lorry Loaders

### Electrical system

521250	Power for automation between upper and lower limit switch	
521246	Electrical equipment for interlock incl. 2 limit switches, 2 interlocks	
521247	Electrical equipment for automatics incl. 2 limit switches, 2 interlocks	
82036	CE-plug	
85374	Optional supply cable, price/metre	
526810-UC60	Signal tower with light and audio modules, audible and/or visible warning to surroundings	

### Signal tower with both audio and light modules

Remove or refit the modules and adjust different audio and light signals as required.

Art.no: 526810-UC60



### Control units

516791	Extra control unit 38112 with up/down feature, delivered fitted	
515343-UC60	Control unit, lockable with key, lock in emergency stop	
515344-UC60	Control unit, without lock	
515345-UC60	Control unit, lockable with key	
<b>Extension cable for UC60 control units with M12 connectors</b>		
86249-3000	Cable M12M-M12F-8 way	extension 3 metres
86249-5000	" " " "	extension 5 metres
86249-10000	" " " "	extension 10 metres
37007	Control unit splitter M12-way. Required when connecting additional control units.	

### Control unit UC60

for fitting in exposed environments. Dual function with emergency stop and lock.



515343-UC60

515344-UC60

515345-UC60

See page 65 for more options.



### TT 3000 INSTALLED IN A PIT

The lorry loader is equipped with guard rails with gate and goal post, protective wire mesh and a load flap.

## Installation of a lift table in a pit


When a lifting table is installed in a pit, the pit should be constructed according to the illustration on the right.

B = Width of the platform  
L = Length of the platform  
H = Lowest height of the lift table


The pit's ballast material must at least meet the concrete classification C12/15.

The hydraulic power pack for lifting tables in an outdoor environment should, where possible, be externally located in a covered or indoor environment.

1. Pipe for incoming cables, 100 mm in diameter. The fixed side of the lift table, B1, placed against this edge.
2. Drainage holes where required. This the third section in the centre of the pit should be 80 mm lower than H.
3. L-shaped profile 100 x 100 mm to reinforce the pit edges.

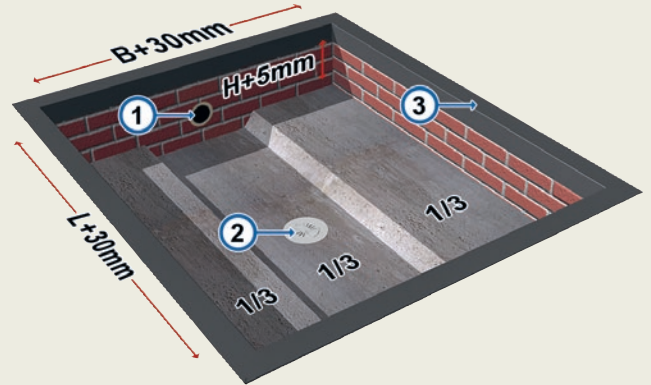

Fixed side of the lift table, B1



### Recommended accessories for placement in a pit

- ▶ Upper limit switch
  - ▶ Lifting eye bolts
  - ▶ Mechanical stop
  - ▶ Inspection hatch in the platform or external hydraulic power pack
- ▶ If the lift table is to be placed in exposed or harsh environments, we recommend surface treatment with corrosion class C4 medium

### TMD 1500 INSTALLED IN A PIT

The lorry loader is galvanized and equipped with guard rails with gate and goal post and protective wire mesh.

