

## PaverCART / VTK-V


Optimize your efficiency on the job site with the PaverCART! Move material with less time & energy. No more wheelbarrows.

- 12" diameter pneumatic tires
- Zinc Plated, high tensile steel
- Over-center cam action clamp handle
- Bottom roller for rolling on & off pallets\*
- Works with many banded or unbanded pavers
- Carrying Capacity: 880 lb (400 kg)

Type	Working Load Limit WLL* lbs (kg)	Dead Weight lbs (kg)	Order- Number
<b>PaverCART</b>	max. 880 (400)	205 (68)	<b>51100015</b>
<b>VTK-V-SR/N</b> 	Supporting wheel for easy handling on even ground. Can be additionally attached at any time	15 (7)	<b>41100041</b>



VTK-V

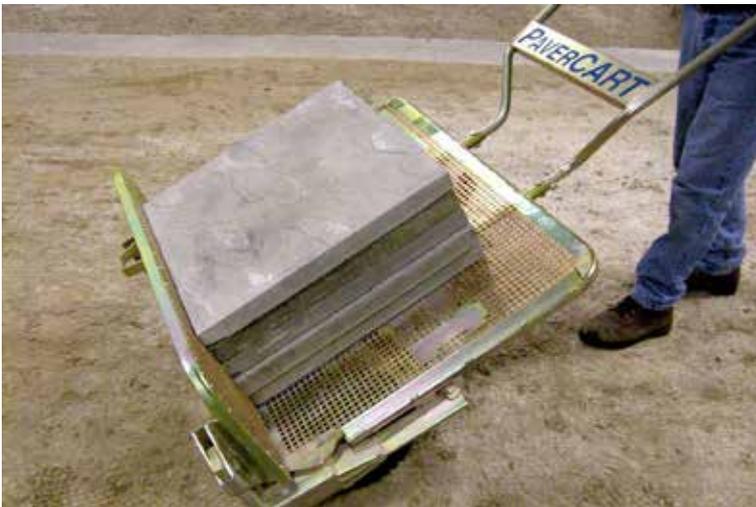

## CartTRAY

- Increases versatility
- Transport equipment & supplies on site
- Dimensions: 34 x 13 in
- Low center of gravity

Type	Opening Range in (cm)	Dead Weight lbs (kg)	Order-Number
<b>CartTRAY</b>	23 - 41 (58.4 - 104)	16 (7.5)	<b>41100010</b>