

Köysipyörät liukulaakereilla/kuulalaakereilla


ADLER®



Köysipyörä liukulaakerilla



Köysipyörä kuulalaakerilla

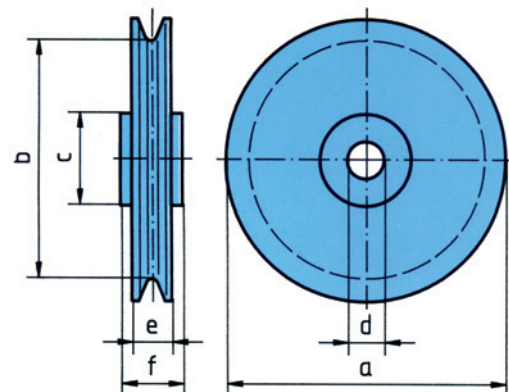

Köysipyörät liukulaakereilla

Malli		WZ 10	WZ 10,5	WZ 11	WZ 12	WZ 12,5	WZ 13	WZ 13,5	WZ 14	WZ 15	WZ 16
Maksimi köysikuorma											
(ei konekäyttö) kg		100	150	250	500	750	1000	1500	2000	3200	5000
kg ¹		50	75	125	250	375	500	750	1000	1600	2500
kg ²		75	100	180	320	500	630	1000	1250	2000	3200
Köysikoko	Ø mm	2-3	3-4	4-5	5-6	6-8	8-10	10-12	12-14	14-16	16-20
Mitat mm	Ø a	60	90	120	150	190	235	280	325	375	470
	Ø b	48	72	100	125	160	200	240	280	320	400
	Ø c	22	32	35	46	62	78	92	108	120	140
	Ø d	8 G7	14 G7	14 G7	22 G7	32 G7	40 G7	50 G7	60 H7	70 H9	70 H9
	e	13	15	18	22	27	32	36	41	48	58
	f	24	32	35	40	42	50	62	70	85	90

¹ 180° Köysikulma

² 90° Köysikulma

Köysipyörät kuulalaakereilla


Malli		WZ 11K	WZ 12K	WZ 12,5K	WZ 13K	WZ 13,5K	WZ 14K	WZ 15K	WZ 16K
Maksimi köysikuorma									
kg ¹		125	250	500	500	750	1000	1600	2500
kg ²		180	320	375	630	1000	1250	2000	3200
Köysikoko	Ø mm	4-5	5-6	6-8	8-10	10-12	12-14	14-16	16-20
Mitat mm	Ø a	120	*	190	235	*	325	375	*
	Ø b	100	*	160	200	*	280	320	*
	Ø c	35	*	74	85	*	120	150	*
	Ø d	55	*	25	30	*	40	60	*
	e	17	*	27	32	*	41	48	*
	f	35	*	34	37	*	70	48	*

¹ 180° Köysikulma

² 90° Köysikulma

* Pyydettyässä

Köysipyörät kiinnitysalustalla, liukulaakereilla

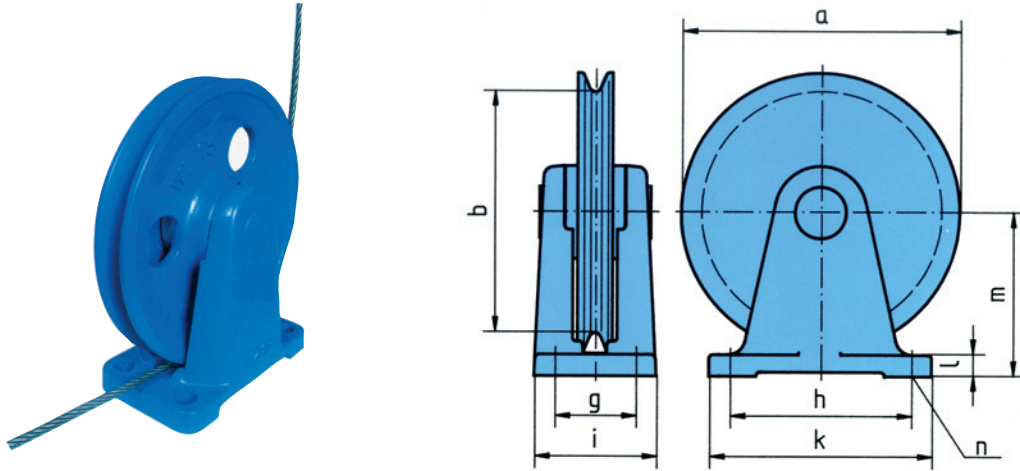

Köysipyörät kiinnitysalustalla, liukulaakereilla

Malli		WZ 20	WZ 20,5	WZ 21	WZ 22	WZ 22,5	WZ 23	WZ 23,5	WZ 24	WZ 25	WZ 26
Maksimi köysikuorma											
(ei konekäyttö) kg		100	150	250	500	750	1000	1500	2000	3200	5000
kg ¹		50	75	125	250	375	500	750	1000	1600	2500
kg ²		75	100	180	320	500	630	1000	1250	2000	3200
Vaijerikoko	Ø mm	2-3	3-4	4-5	5-6	6-8	8-10	10-12	12-14	14-16	16-20
Mitat mm	Ø a	60	90	120	150	190	235	280	325	375	470
	Ø b	48	72	100	125	160	200	240	280	320	400
	g	30	44	50	55	65	70	80	95	95	125
	h	42	62	70	88	120	150	180	212	240	310
	i	44	66	74	82	95	108	120	143	185	225
	k	56	84	92	115	150	187	220	260	300	380
	l	8	10	13	15	17	20	22	25	22	30
	m	40	57	75	92	115	138	164	190	212	270
	Ø n	7	9	11,5	11,5	14	18	18	23	26	33

¹ 180° Köysikulma

² 90° Köysikulma

Köysipyörät kiinnitysalustalla, kuulalaakereilla

Malli		WZ 21K	WZ 22K	WZ 22,5K	WZ 23K	WZ 23,5K	WZ 24K	WZ 25K	WZ 26K
Maksimi kuorma									
kg ¹		125	250	500	500	750	1000	1600	2500
kg ²		180	320	375	630	1000	1250	2000	3200
Vaijerikoko	Ø mm	4-5	5-6	6-8	8-10	10-12	12-14	14-16	16-20
Mitat mm	Ø a	120	150	190	235	280	325	375	*
	Ø b	100	125	160	200	240	280	320	*
	g	50	55	65	70	80	95	95	*
	h	68	88	120	150	180	212	240	*
	i	74	82	95	108	120	143	185	*
	k	92	115	150	187	220	260	300	*
	l	13	15	17	20	22	25	22	*
	m	75	92	115	138	164	190	212	*
	Ø n	11,5	11,5	14	18	18	23	26	*

¹ 180° Köysikulma

² 90° Köysikulma

* Pyydettyessä